



深圳市和镓晟科技有限公司
Shenzhen Heyisheng Technology Co., Ltd

PRODUCT SPECIFICATION FOR LCD MODULE

(产品规格书)

Reversion (版本) : 1.0

Module No. (模组型号) : HYS-057BT3S7P001

Customer Name: (客户名) : _____

Project Name: (客户项目名) : _____

CUSTOMER APPROVED (客户确认) :

结构部	电子部	品质部	项目部

Please sign back after confirmed. (确认后请签回)

SHEN ZHEN HE YI SHENG TECHNOLOGY CO., LTD

QA Dept. (品质)	Tech. Dept. (工程)	Sale Dept. (业务)
吴作榛	尹建华	

[illegible]



CONTENTS 目录

- 1. GENERAL INFORMATION 主要特征描述**
- 2. ELECTRICAL CHARACTERISTICS 电气参数**
 - 2.1 LCM Electrical Characteristics 模组电气参数
- 3. EXTERNAL DIMENSIONS AND INTERFACE DESCRIPTION 外形接口定义**
 - 3.1 External Dimensions 外形尺寸
 - 3.2 LCM interface description LCM 接口功能描述
 - 3.3 TP interface description TP 接口功能描述
 - 3.4 Power on/off sequence 上下电时序描述
 - 3.5 RGB Interface Definition 屏参描述
- 4. ELECTRO-OPTICAL CHARACTERISTICS 光电参数**
 - 4.1 LCM ELECTRO_Optical Characteristics LCM 光电参数
- 5. RELIABILITY TEST CONDITIONS 可靠性试验条件**



1. GENERAL INFORMATION 主要特征描述

Item of general information 项目	Contents 内容	Unit 单位
LCD Type 液晶显示类型	TFT/TRANSMISSIVE	/
Recommended Viewing Direction 模块推荐使用方向	ALL	O' Clock
Module area (W×H×T) 模块外围尺寸(宽×高×厚)	127.0(W)*98.43(L)*5.8(H)	mm
Active area (W×H) 有效区域 (宽×高)	115.2(W)* 86.40(L)	mm
Number of Dots 点阵	640(RGB)×480	/
Pixel pitch (W×H) 像素大小(宽×高)	180(H)×180(V)	um
Driver IC 驱动IC	JD9168S	/
Interface Type 接口类型	RGB MIPI LVDS	/
Colors 色彩	16.7M	/
Backlight Type 背光类型	LED	/

2. Electrical Characteristics 电气参数

2.1 LCM Electrical Characteristics 模组电气参数

2.1.1. ABSOLUTE MAXIMUM RATINGS 极限参数

Parameter of absolute maximum ratings 参数	Symbol 符号	Min 最小值	Max 最大值	Unit 单位
Operating temperature 操作温度	T _{op}	-20	70	°C
Storage temperature 储存温度	T _{st}	-30	80	°C
Humidity 湿度	RH	-	90%(Max60 °C)	RH

2.1.2. ELECTRICAL CHARACTERISTICS 模块电气特性

Parameter of DC characteristics 参数	Symbol 符号	Min 最小值	Typ 典型值	Max 最大值	Unit 单位
Supply Voltage	IOVCC	2.8	3.0	3.3	V
	AVDD	5.2	5.5	5.8	V V
	AVEE	-5.8	-5.5	-5.2	
Input Current 输入电流	I _{dd}	-	TBD		mA
Input voltage 'H' level 输入高电平	V _{IH}	0.7VCC	-	VCC	V
Input voltage 'L' level 输入低电平	V _{IL}	V _{SSI}	-	0.3VCC	V




2.1.3. Backlight Characteristics 背光电气特性

Item of backlight characteristics 项目	Symbol	Min.	Typ.	Max.	Unit	Condition
Forward voltage 正向电压	V_f	8.1	9.0	9.9	V	$I_f=140\text{mA}$
Number of LED LED数量	-	-	21	-	Piece	-
Connection mode 连接类型	3S7P	-		-	-	-


Using condition: constant current driving method $I_f=140\text{mA}(\pm 10\%)$.

使用条件：恒流的驱动方式 $I_f=140\text{mA}$



3. EXTERNAL DIMENSIONS AND INTERFACE DESCRIPTION 外形接口定义

3.1 External Dimensions 外形尺寸

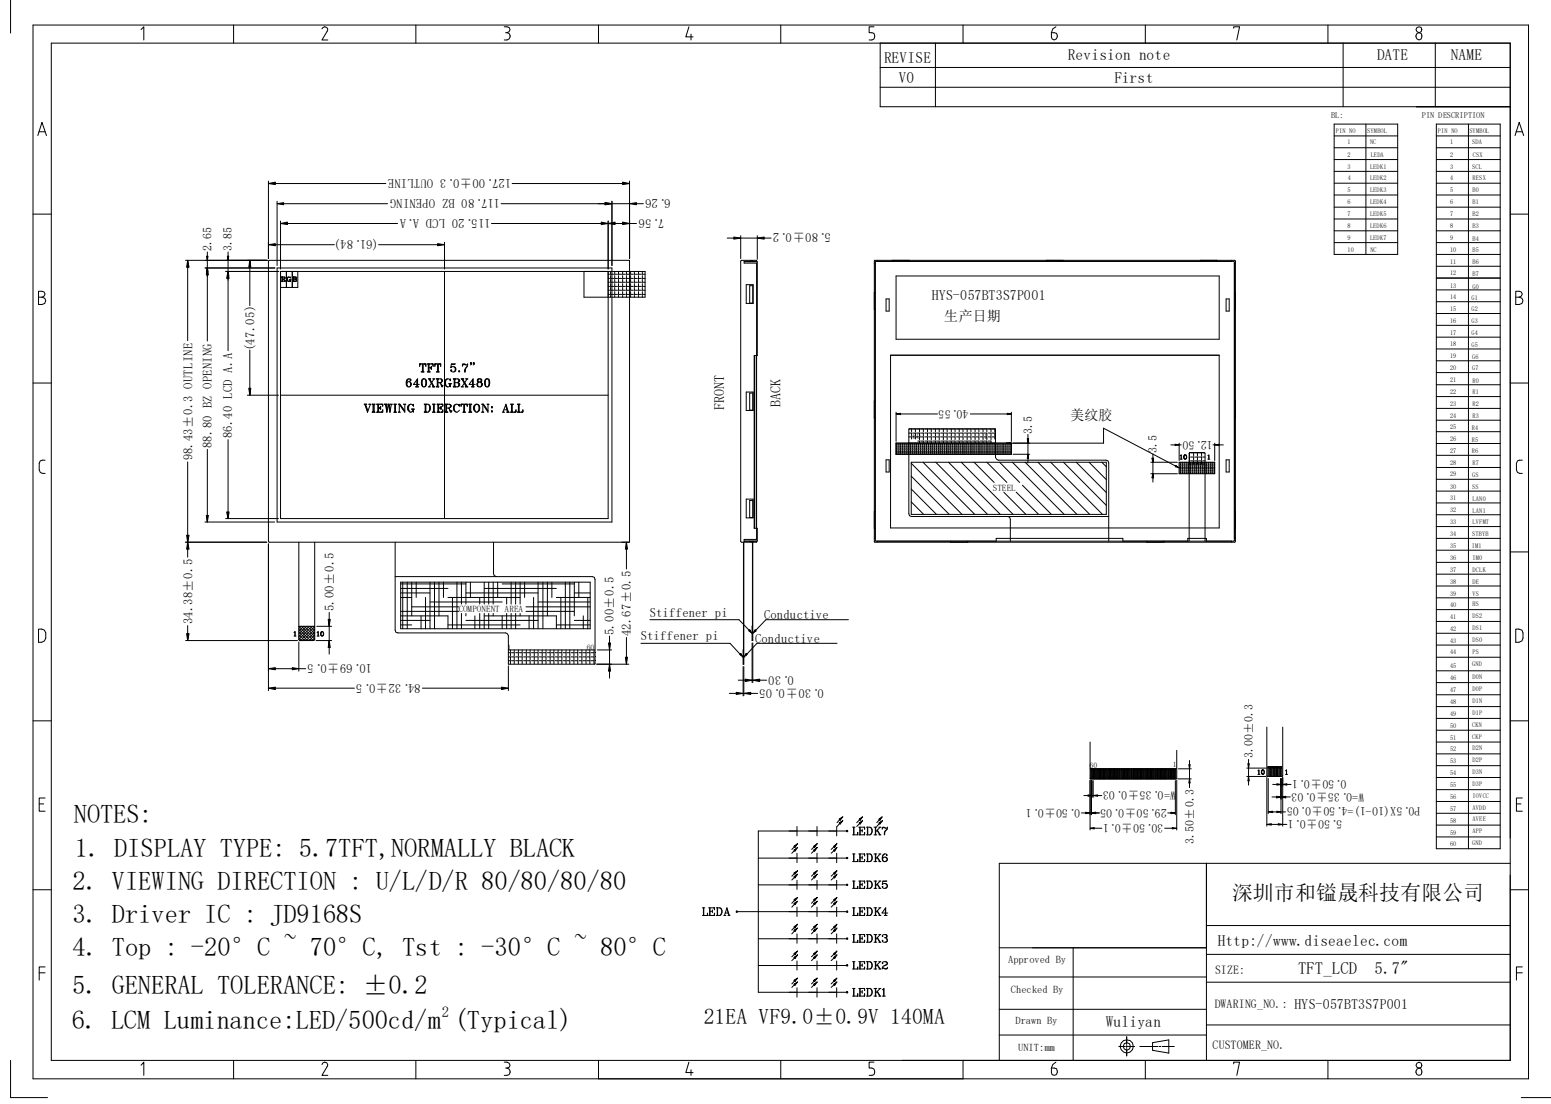



3.2 LCM interface description LCM接口

Pin NO.	Pin name	Description	Pin NO.	Pin name	Description	Pin NO.	Pin name	Description	Pin NO.	Pin name	Description
1	SDA	SPI data	16	G3	RGB data	31	LAN0	lane mode	46	D0N	LVDS D0N
2	CSX	Chip select	17	G4	RGB data	32	LAN1	lane mode	47	D0P	LVDS D0P
3	SCL	SPI clock	18	G5	RGB data	33	LVFMT	LVDS data format	48	D1N	LVDS D1N
4	RESX	Reset	19	G6	RGB data	34	STBYB	standby mode	49	D1P	LVDS D1P
5	B0	RGB data	20	G7	RGB data	35	IM1	IF mode select	50	CKN	LVDS CKN
6	B1	RGB data	21	R0	RGB data	36	IM0	IF mode select	51	CKP	LVDS CKP
7	B2	RGB data	22	R1	RGB data	37	DCLK	RGB clock	52	D2N	LVDS D2N
8	B3	RGB data	23	R2	RGB data	38	DE	RGB data enable	53	D2P	LVDS D2P
9	B4	RGB data	24	R3	RGB data	39	VS	RGB V-sync	54	D3N	LVDS D3N
10	B5	RGB data	25	R4	RGB data	40	HS	RGB H-sync	55	D3P	LVDS D3P
11	B6	RGB data	26	R5	RGB data	41	DS2	data lane seq	56	IOVCC	Power
12	B7	RGB data	27	R6	RGB data	42	DS1	data lane seq	57	AVDD	Power
13	G0	RGB data	28	R7	RGB data	43	DS0	data lane seq	58	AVEE	Power
14	G1	RGB data	29	GS	gate scan	44	PS	data lane seq	59	VPP	OTP power
15	G2	RGB data	30	SS	source scan	45	GND	Ground	60	GND	Ground



注：1.当使用LVDS接口时：PS=1；DS2=0；DS1=0；DS0=0

2.当使用MIPI接口时：PS=1；DS2=1；DS1=0；DS0=0


3.IM及LANSEL选择

IM[1:0]	I	IOVCC/VSSD	Select the interface mode as listed below:			
			IM[1:0]		Interface	
			0	0	DSI	
			0	1	LVDS	
			1	0	RGB	
			1	1	Not used	
			RGB IF data format (RGB565 / RGB666 / RGB888) is selected by DCS comr (0x3A).			

LANSEL[1:0]	I	IOVCC/VSSD	Select the lane mode as listed below:			
			LANSEL[1:0]		DSI IF	LVDS IF
			0	0	Not used	Not used
			0	1	2 Lane	Not used
			1	0	3 Lane	6 Bit
			1	1	4 Lane	8 Bit



3.4 Power on/off sequence.

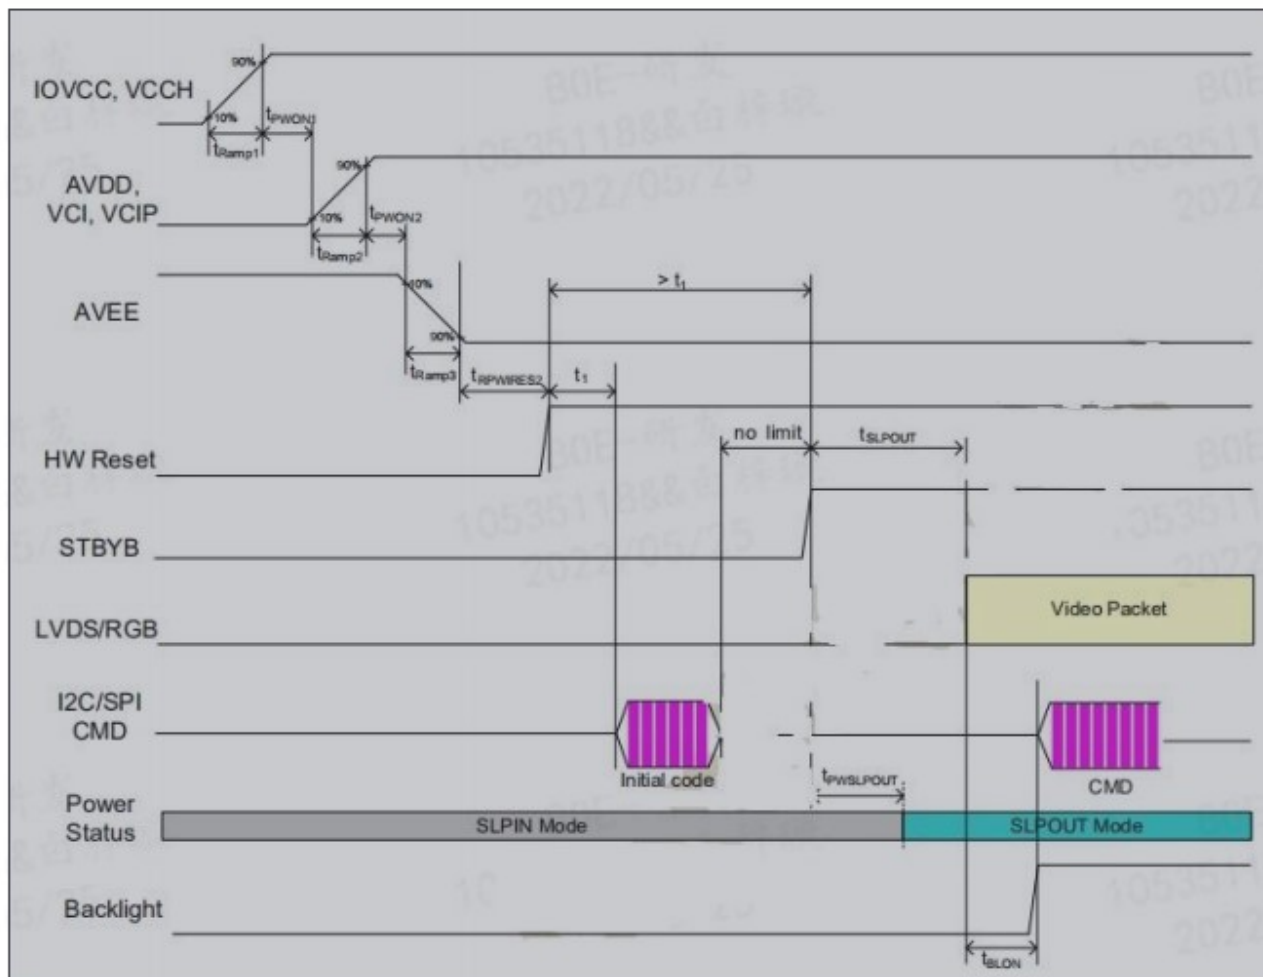




3.5. RGB Interface Definition

Horizontal Timing

Parameter	Symbol	Spec.			Unit
		Min.	Typ.	Max.	
DCLK Frequency	fclk	-	21	-	MHz
Horizontal Display Area	thd	640			DCLK
HS Period	th		-	-	DCLK
HS Pulse Width	thpw	-	20	-	DCLK
HS Back Porch	thbp	-	20	-	DCLK
HS Front Porch	thfp	-	20	-	DCLK


Horizontal Timings

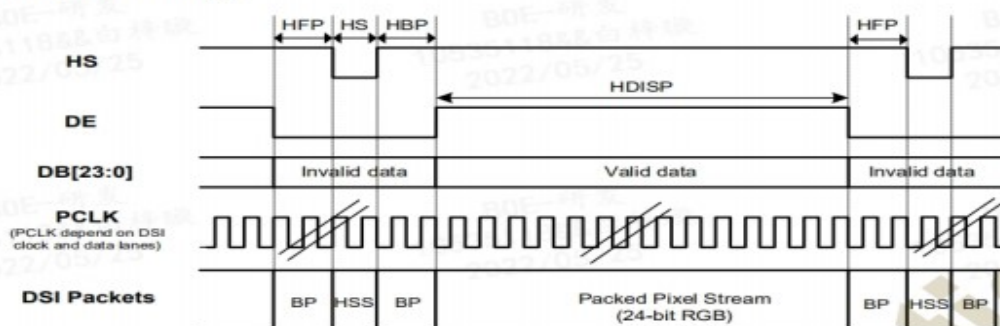

Vertical Timing

Parameter	Symbol	Spec.			Unit
		Min.	Typ.	Max.	
Vertical Display Area	tvd	480			TH
VS Period	tv	-	-	-	TH
VS Pulse Width	tvpw	2	4	-	TH
VS Back Porch	tvbp	2	4		TH
VS Front Porch	tvfp	2	10	-	TH

Vertical Timings

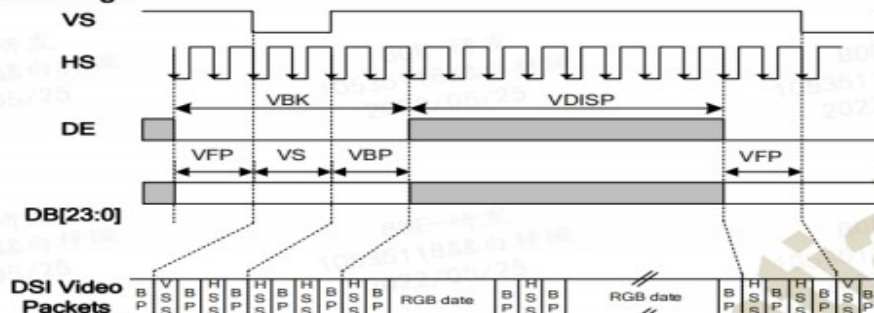



4. ELECTRO-OPTICAL CHARACTERISTICS 光电参数

4.1 LCM ELECTRO_Optical Characteristics LCM光电参数

Item of electro-optical characteristics 项目	Symbol 符号	Condition 条件	Min 最小值	Typ 典型值	Max 最大值	Unit 单位	Remark 注释
Contrast ratio 对比度	CR	$\theta = 0^\circ$ $\psi = 0^\circ$ $I_f = 20\text{mA}$ /LED	1000	1200	-	-	Note 1
Surface Luminance 表面亮度	Lv		450	500	-	Cd/m ²	Note 2
Luminance uniformity 均匀度	δ (WHITE)		75	80	-	%	Note 3
Response time 响应时间	Tr+Tf		-	30	35	ms	Note 4
Viewing angle range 视角范围	θ (CR ≥ 10)	6o' clock	75	80	-	degree	Note 5
		12o' clock	75	80	-		
		3o' clock	75	80	-		
		9o' clock	75	80	-		
Module Chromaticity CIE (x, y) 色坐标	White	x	0.262	0.292	0.332	-	Note6
		y	0.307	0.337	0.367		
NTSC Ratio 色域	S	-	-	60	-	%	Note7

Note1. Contrast Ratio (CR) is defined mathematically by the following formula. For more information see FIG 1.:

$$\text{Contrast Ratio} = \frac{\text{Average Surface Luminance with all white pixels (P1, P2, P3, P4, P5, P6, P7, P8, P9)}}{\text{Average Surface Luminance with all black pixels (P1, P2, P3, P4, P5, P6, P7, P8, P9)}}$$

备注1. 对比度是由以下公式计算所得。详见FIG 1.。

$$\text{对比度} = \frac{\text{显示白色画面时平均表面亮度(P1,P2,P3,P4,P5,P6,P7,P8,P9)}}{\text{显示黑色画面时平均表面亮度(P1,P2,P3,P4,P5,P6,P7,P8,P9)}}$$

Note2. Surface brightness is the center brightness value of the test when displaying a white screen. For more information see FIG 1.

$$L_v = \text{Surface Luminance with center pixels (P5)}$$

备注2. 表面亮度是在显示白色画面时，测试的中心亮度值，详见FIG 1.。

$$L_v = \text{中心点表面亮度(P5)}$$

Note3. The uniformity in surface luminance (δ WHITE) is determined by measuring luminance at each test



position 1 through 9, and then dividing the maximum luminance of 9 points luminance by minimum luminance of 9 points luminance. For more information see FIG 1.

$$\delta \text{ WHITE} = \frac{\text{Minimum Surface Luminance with all white pixels (P1, P2,P3,P4,P5,P6,P7,P8,P9)}}{\text{Maximum Surface Luminance with all white pixels (P1, P2,P3,P4,P5,P6,P7,P8,P9)}}$$

备注3. 均匀度是在显示白色画面时，测试P1到P9的亮度，然后再用5个点亮度的最小值除以最大值。详见FIG 1.。

$$\text{均匀度} = \frac{\text{表面亮度最小值(P1, P2, P 3,P4, P5,P6,P7,P8,P9)}}{\text{表面亮度最大值(P1, P2, P 3,P4, P5,P6,P7,P8,P9)}}$$

Note4. Response time is the time required for the display to transition from White to black(Rise Time, Tr) and from black to white(Decay Time, Tf). For additional information see FIG 2..

备注4. 响应时间是Tr(上升时间)与Tf(下降时间)的和; Tr 指显示黑色画面转为显示白色画面需要时间, Tf 指显示白色画面转为显示黑色画面需要时间。详见FIG 2.。

Note5. Viewing angle is the angle at which the contrast ratio is greater than 2. For TFT module the contrast ratio is greater than 10. The angles are determined for the horizontal or x axis and the vertical or y axis with respect to the z axis which is normal to the LCD surface. For more information see FIG 3.

备注5. 视角指对比度大于等于2时的可视范围，对TFT 屏，则是对比度大于等于10 的可视范围。视角由横轴（x轴），竖轴（y轴）同Z轴(垂直于LCD 表面)之间的夹角来定义。详见FIG 3.

Note6. CIE (x, y) chromaticity ,The x,y value is determined by screen active area position 5. For more information see FIG 1.

备注6. CIE(x,y) 色坐标测试点为显示屏中心点P5。详见FIG 1.

Note7: NTSC ratio: For more information see FIG 4.

$$\text{NTSC ratio} = \frac{\text{Area of RGB triangle}}{\text{Area of NTSC triangle}}$$

备注7. 色域比： 详见FIG 4

$$\text{NTSC ratio} = \frac{\text{RGB三色三角形面积}}{\text{标准NTSC三角形面积}}$$

Note8. For Viewing angle and response time testing, the testing data is base on Autronic-Melchers's ConoScope. Series Instruments. For contrast ratio, Surface Luminance, Luminance uniformity and CIE, the testing data is base on BM-7 photo detector.

备注8. 视角和响应时间， 测试数据基于Autronic-Melchers's ConoScope. 系列。而对比度，表面亮度，均匀度，CIE 坐标，测试数据基于BM-7 photo detector.

Note9. For TFT transmissive module, Gray scale reverse occurs in the direction of panel viewing angle

备注9. TFT 全透产品,在视角方向会发生灰度反转

FIG.1. Measuring method for Contrast ratio, surface luminance, Luminance uniformity, CIE (x, y) chromaticity
对比度，表面亮度，均匀度，CIE坐标测试方法

A :H/6 mm

B : V/6 mm

Active Area

spot size Ø=5mm, 500mm distance from the surface to detector lens

measurement instrument is luminance meter BM-7

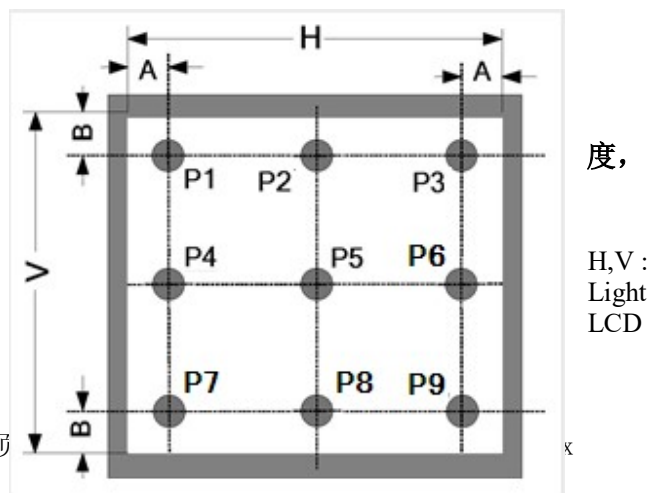




FIG. 2. The definition of Response Time 响应时间定义

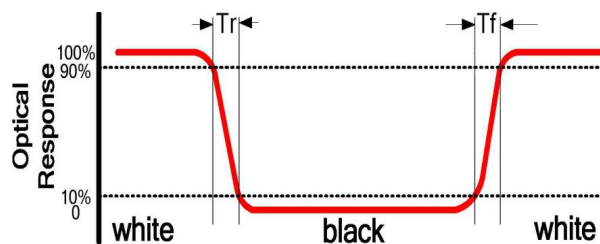


FIG.3. The definition of viewing angle 视角定义


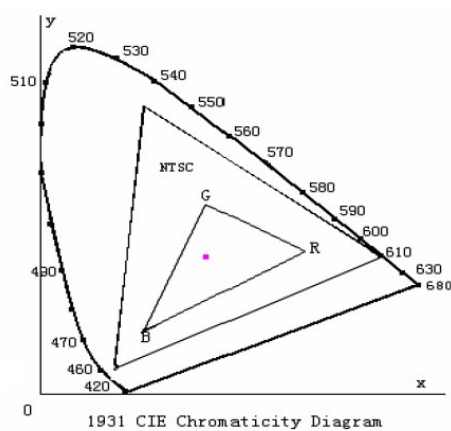


Fig.4. 1931 CIE chromaticity diagram

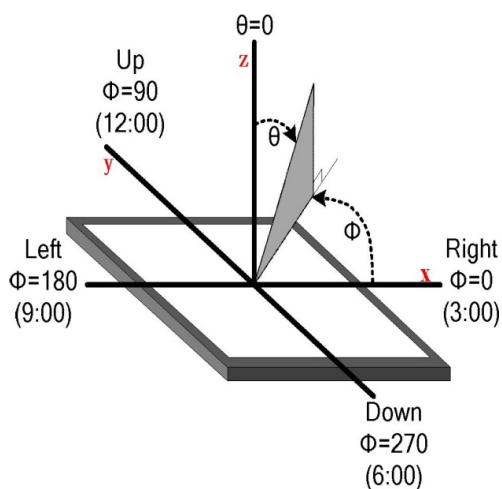

5. RELIABILITY TEST CONDITIONS 可靠性试验条件

No. 序号	Test Item 试验项目	Test Condition 试验条件	Inspection after test 判断标准
1	High Temperature Storage 高温存放	80±2℃/96 hours	Inspection after 2~4hours storage at room temperature, the sample shall be free from defects: 试验结束后, 已测试的LCD 样品必须在室内正常温湿度环境下放置2~4 个小时以上才能进行功能和外观检查, 样品不允许有以下缺陷: 1.Air bubble in the LCD; 模块中有气泡; 2.Sealleak; 封口松脱; 3.Non-display; 不显示; 4.missing segments; 漏笔 5.Glass crack; 玻璃破碎; 6.Current Idd is twice higher than initial value. 电流Idd 大于初时值的2 倍 7, the surface shall be free from damage..表面无损伤. 8. The electrical characteristics requirements shall be satisfied. 需要满足模块电气性能。
2	Low Temperature Storage 低温存放	-30±2℃/96 hours	
3	High Temperature Operating 高温操作	70±2℃/96 hours	
4	Low Temperature Operating 低温操作	-20±2℃/48 hours	
5	Temperature Cycle 冷热循环	-10±2℃(30min.) ~60(30min.)±2℃×48 cycles	
6	High temperature and high humidity 高温高湿	60℃±5℃×90%RH/48 hours	
7	Vibration Test 振荡试验	Frequency: 10Hz~55Hz~10Hz Amplitude: 1.5mm, X, Y, Z direction for total 0.5hours (Packing condition)	
8	Dropping test 跌落试验	Drop to the ground from 1.0m height, one time, every side of carton. (Packing condition)	
9	ESD test 静电试验	R: 330Ω C: 150pF , 10time Air discharge: ±6KV Contact discharge: ±4KV	
Remark: 注意: 1. The test samples should be applied to only one test item. 每个被测试的模块只能用于其中的一个测试项目。 2. Sample size for each test item is 5~10pcs. 每个测试项目的样品数量为5~10 片。 3. For Damp Proof Test, Pure water(Resistance>10MΩ) should be used. 对于防潮试验, 试验箱的用水必须是电阻大于10M 欧姆的纯水。 4. In case of malfunction defect caused by ESD damage, if it would be recovered to normal state after resetting, it would be judged as a good part. 如果由静电引起产品故障, 当放置一段时间后能够恢复正常, 则不视为产品缺陷。 5. EL evaluation should be excepted from reliability test with humidity and temperature: Some defects such as black spot/blemish can happen by natural chemical reaction with humidity and Fluorescence EL has. 带EL片的可靠性测试在高温高湿条件下, 荧光粉会发生自然化学反应而产生黑点或瑕疵, 因此不在高温高湿条件测试范围内。 6. Failure Judgment Criterion: Basic Specification, Electrical Characteristic, Mechanical Characteristic, Optical Characteristic. 故障判断标准: 基本规格, 电气特性, 机械特性, 光电特性			